

## Code 800

The secret code for optimal protection

PN: UPLI-LI080CO-AZ01B  
EAN: 6422956009342

### Specifications

<b>Capacity</b>	800 VA / 480 W
<b>Type</b>	Line-interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	162-290 VAC
Frequency Range	60 Hz / 50 Hz (auto sensing)
Phase	Single phase with ground
<b>Output</b>	
Nominal Voltage	230 VAC
Accepted deviation range	± 10 %
Frequency Range (Batt. Mode)	50 Hz or 60Hz ± 1 Hz
Waveform (Batt. Mode)	Simulated sine-wave
<b>Transfer Time</b>	
AC Mode to Batt. Mode	Typical 4 ms / Max 10 ms
<b>Efficiency</b>	
AC Mode	≥ 95 % at full charged battery
To Battery Mode	≥ 60 % at full charged battery
<b>Indicators type</b>	
LCD Display	UPS status, Load level, Battery level, Input/Output voltage
Alarm	Battery mode, Low battery, Overload, Fault
<b>Protection</b>	
Full protection	Overload, Discharge & Overcharge protection



Software management



LCD display



Rack design

- Auto-Restart while AC is recovering
- Excellent microprocessor control guarantees high reliability
- Boost and buck AVR for voltage stabilization
- Off-mode charging
- Simulated sine-wave
- Cold start function
- User-friendly LCD
- Software management

## Outlets type

Input 1 x IEC-320 C14

Output 4 x IEC C13

## Environment

Humidity 0-90 % RH @ 0-40°C (non-condensing)

Noise level Less than 40dB

## Battery

Battery Type & Number 1 x GP09122L (PN: BTVACGUEBTC2LAZO1B)

Charging Current (Max.) 1A

Typical Recharge Time 4-6 hours recover to 90% capacity for internal battery at 1A charging current



Running time on battery (minutes)  
25% Load - 15 min  
50% Load - 5.5 min  
75% Load - 20 sec  
100% Load - 1 sec

## Management

Connection port USB port

Software <https://www.power-software-download.com/viewpower.html>

Software capability Monitor & Control over USB

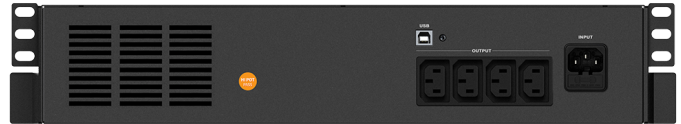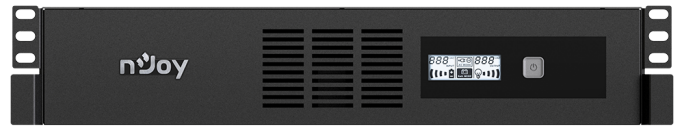


## Physical

Product dimensions 230 x 438 x 86 mm

Product weight 7.7 kg



## Running time on battery

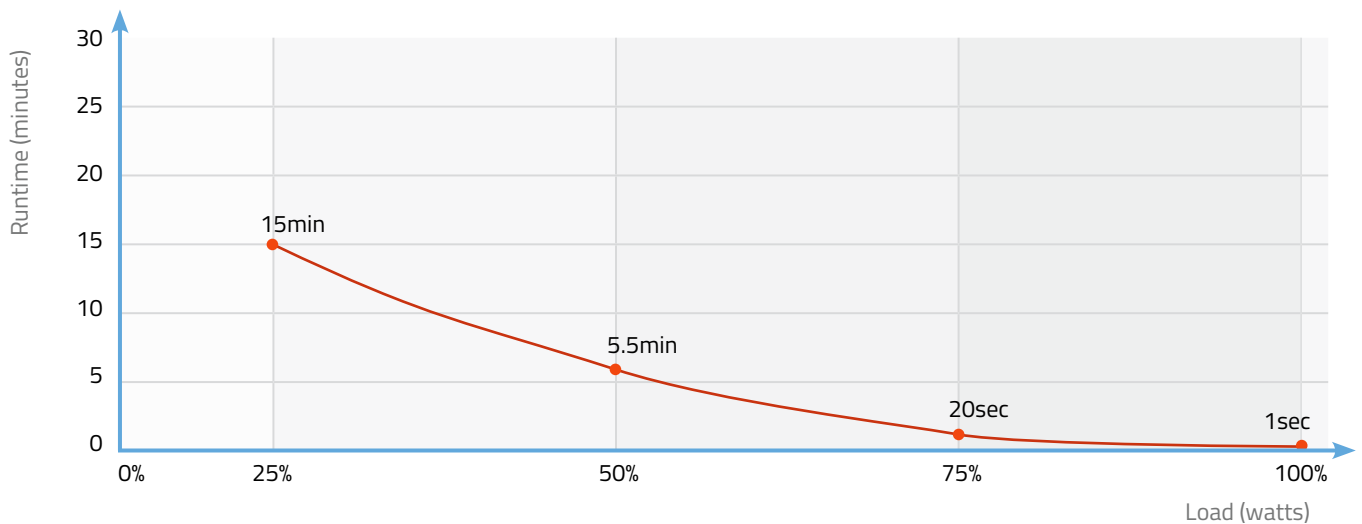

## Logistics

Carton Box Size (LxWxH)	324 x 498 x 201 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 7.7 kg / G.W.: 9.2kg



## Certificates

RoHS 2011/65/EU CE

