

# Seth 650

Rule out the risk

PN: PWUP-LI065ST-CG01B  
EAN: 6422956007751

## Specifications

<b>Capacity</b>	650 VA / 360 W
<b>Type</b>	Line-Interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	140 ~ 300 VAC
Frequency Range	50Hz ~ 60Hz (Auto Sensing)
<b>Output</b>	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	± 10%
Frequency Range (Batt. Mode)	50 Hz ~ 60Hz ± 1 Hz
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	Typical 4 ms
Overload Protection	Inner firmware protection
<b>AVR</b>	
Type	2 Boost / 1 Buck
<b>Indicators type &amp; Alarm</b>	
AC Mode	Orange lighting
Battery Mode	Orange flashing and sounding every 30 sec
Low Battery	Orange flashing and sounding every 2 sec
Overload	Orange lighting and sounding every 0.5 sec
<b>Protection</b>	
Outlets type	2 x Schuko Battery Backup & Surge Protection
Full protection	Overload, Overcharge, Over voltage, High temperature



2 x Schuko outlets with protection



Auto-Restart



Simulated sinewave

- Simulated sinewave
- Line-Interactive
- Auto-Restart while AC is recovering
- Auto-Charge
- Automatic Voltage Regulation
- Off-Mode charging
- Cold start function
- Compact size

## Environnement

Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Noise level	Less than 40dB

## Battery


Battery Type & Number	12V 5Ah x 1
Battery Voltage	12V
Charging Voltage	13.65Vdc
Typical Recharge Time	8 hours up to 90% capacity
Battery Compatibility	nJoy PW5123
Running time on battery (minutes)	25% Load - 16 min 50% Load - 4.5 min 75% Load - <2 min 100% Load - <1 min

## Physical

Product dimensions	252 x 84 x 158 mm
Product weight	3.82 kg
Retail pack dimensions	286 x 122 x 225 mm
Retail pack Net Weight	3.82 kg
Retail pack Gross Weight	4.1 kg



## Running time on battery

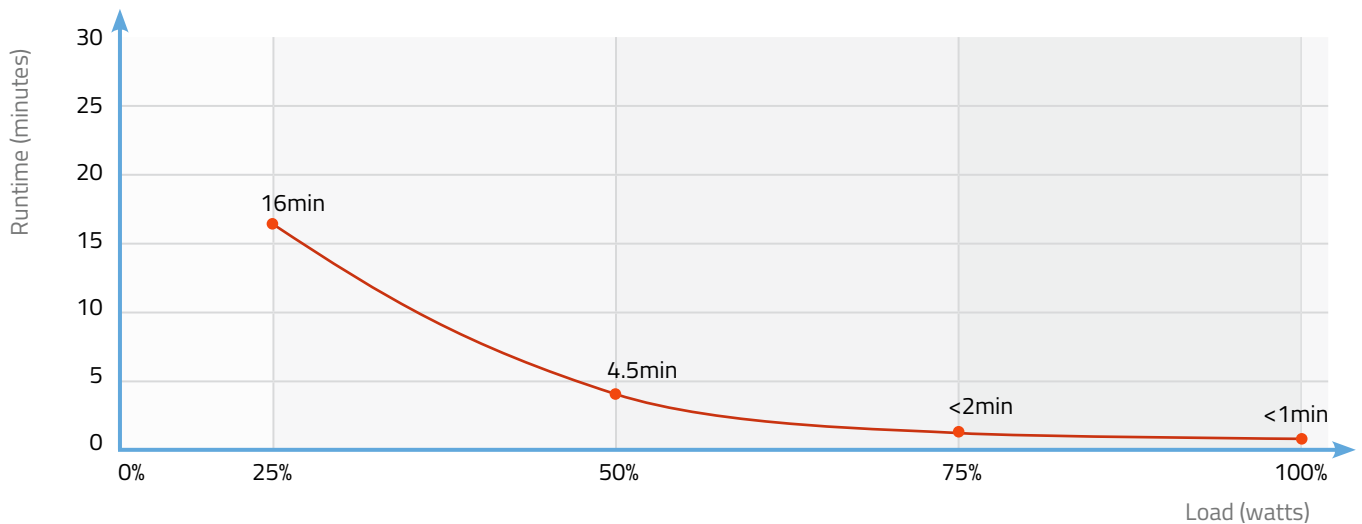

## Logistics

Carton Box Size (LxWxH)	583 x 251 x 237 mm
Pieces in the Carton Box	4
Net & Gross weight / CTN	N.W.: 15.3 kg / G.W.: 16.9 kg



## Certificates

RoHS  CE

